
SITE PLAN

SCALE NOT TO SCALE 006

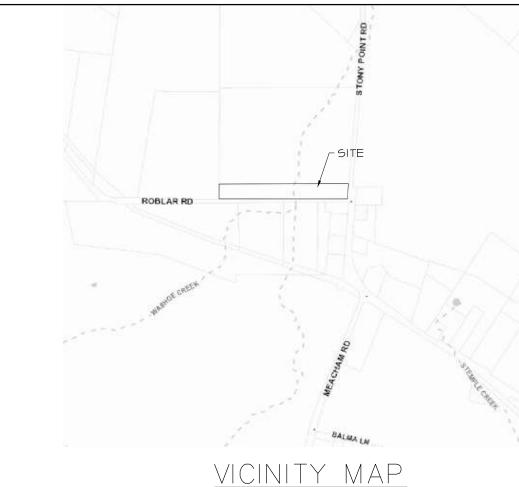

SCOPE OF WORK:

ALTERATION OF PARKING AREA CONSISTING OF PAVING OVER EXISTING ROCKED PARKING AREA, REMOVING 12" OF EXISTING SUBGRADE, COMPACTING SUBGRADE TO 90% R.C., IMPORTING 12" CLASS-2 ROAD BASE ROCK, AND CAPPING WITH 3" OF ASPHALTIC CONCRETE (A/C). SEAL COATING THE EXISTING PARKING PAVED AREAS. RESTRIPE PARKING STALLS. CREATING TWO CODE COMPLIANT ACCESSIBLE PARKING STALLS ADJACENT TO THE WASHOE HOUSE WITH CODE COMPLIANT ACCESS PATH TO FRONT DOOR. REPAIRS, CONSTRUCTION AND ALTERATIONS WILL NOT ALTER THE EXISTING DRAINAGE PATH.

EXISITNG PAVED AREA: NEW PAVED AREA: 22648 SQ. FT. 4446 SQ. FT. NEW PAVED ACCESSIBLE AREA: 712 SQ. FT.

SHEET INDEX:

1 EXISTING SITE

2 PROPOSED PARKING ALTERATION

3 EROSION CONTROL MEASURES

WASHOE HOUSE 2840 ROBLAR ROAD PETALUMA, CA 94952

CONTRACTOR:
EMPIRE ASPHALT AND ENGINEERING
3980 SANTA ROSA AVENUE #2
SANTA ROSA, CA 95407
707-545-7440
CONTACT: RODNEY SICHEL

HOUSE W/ PROP


REVISION / DATE EXCEL

DATE:	06/19/20
SCALE:	l"=20'
DRAWN BY:	PRC
JOB #:	144.01

144.01

FILE #:



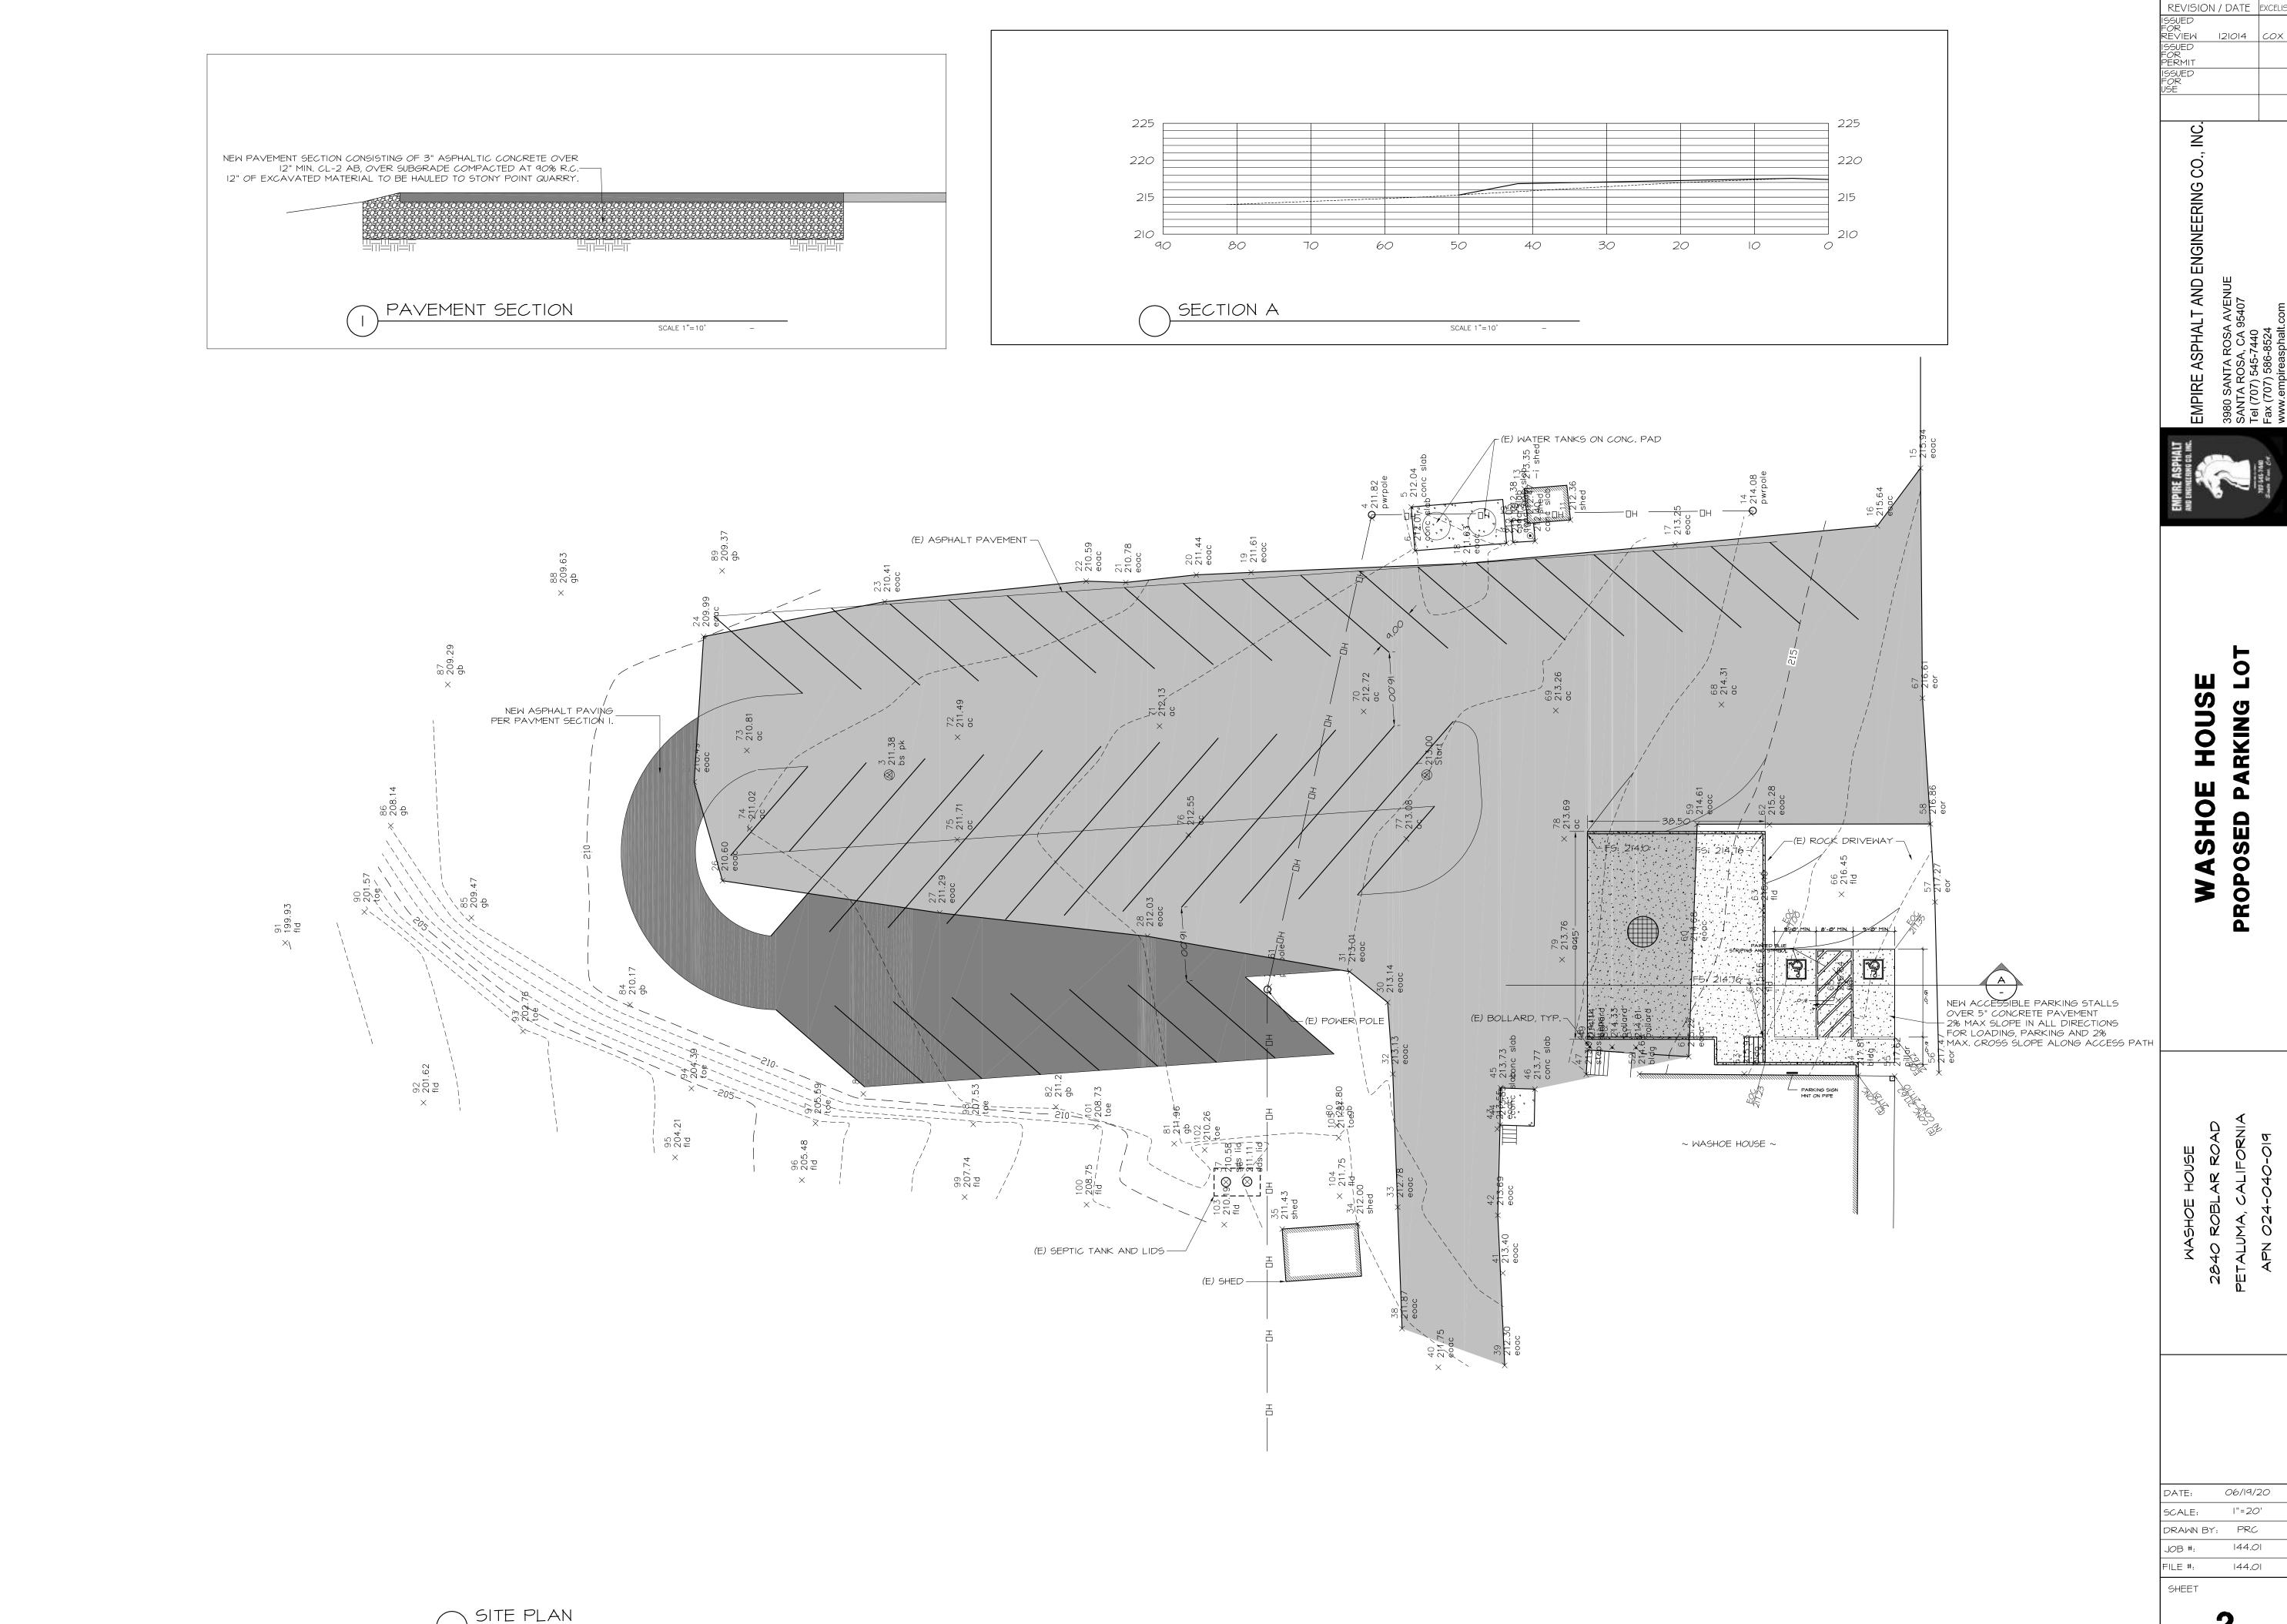

SCALE 1/16"=1'0" 006

OF 3 SHEETS

- 1. PERFORM EROSION PREVENTION AND SEDIMENT CONTROL IN ACCORDANCE WITH CHAPTER 11A AND 11 OF THE SONOMA COUNTY
- CODE (SCC).

 2. THE APPROVED PLANS SHALL CONFORM WITH THE PERMIT AND RESOURCE MANAGEMENT DEPARTMENT'S (PRMD) EROSION
- PREVENTION AND SEDIMENT CONTROL BEST MANAGEMENT PRACTICES (BMP'S) GUIDE AS POSTED ON THE PRMD WEBSITE.
- 3. THE OWNER IS RESPONSIBLE FOR PREVENTING STORM WATER POLLUTION GENERATED FROM THE CONSTRUCTION SITE YEAR ROUND. WORK SITES WITH INADEQUATE EROSION AND SEDIMENT CONTROL MAY BE SUBJECT TO A STOP WORK ORDER.
- 4. IF DISCREPANCIES OCCUR BETWEEN THESE NOTES, MATERIAL REFERENCED HEREIN OR MANUFACTURER'S RECOMMENDATIONS, THEN THE MOST PROTECTIVE SHALL APPLY.
- 5. AT ALL TIMES THE OWNER IS RESPONSIBLE FOR OBTAINING AND COMPLYING WITH THE STATE OF CALIFORNIA NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM (NPDES) GENERAL PERMIT WASTE DISCHARGE REQUIREMENTS FOR DISCHARGES OF STORM WATER RUNOFF ASSOCIATED WITH CONSTRUCTION ACTIVITY. CONSTRUCTION ACTIVITIES INCLUDE BUT ARE NOT LIMITED TO CLEARING, GRADING, EXCAVATION, STOCKPILING, AND RECONSTRUCTION OF EXISTING FACILITIES INVOLVING REMOVAL AND REPLACEMENT.

RAINY SEASON OPERATIONS

- 1. THE OWNER MUST IMPLEMENT AN EFFECTIVE COMBINATION OF EROSION PREVENTION AND SEDIMENT CONTROL ON ALL DISTURBED AREAS DURING THE RAINY SEASON (OCTOBER 15 APRIL 15). CONSTRUCTION GRADING AND DRAINAGE IMPROVEMENT SHALL BE PERMITTED DURING THE RAINY SEASON ONLY WHEN ON—SITE SOIL CONDITIONS PERMIT THE WORK TO BE PERFORMED IN COMPLIANCE WITH SCC CHAPTER 11 AND 11A . STORM WATER BMPS REFERENCED OR DETAILED IN THE PERMIT AUTHORITY'S BEST MANAGEMENT PRACTICES GUIDE SHALL BE IMPLEMENTED AND FUNCTIONAL ON THE SITE AT ALL TIMES
- 2. THE AREA OF ERODIBLE LAND EXPOSED AT ANY ONE TIME DURING THE WORK SHALL NOT EXCEED 1 ACRE OR 20% OF THE PERMITTED WORK AREA, WHICHEVER IS GREATER, AND THE TIME OF EXPOSURE SHALL BE MINIMIZED TO THE MAXIMUM EXTENT PRACTICABLE
- 3. AGRICULTURAL GRADING AND DRAINAGE IMPROVEMENTS, AND INITIAL LAND PREPARATION WORK FOR VINEYARD AND ORCHARD PLANTING, SHALL BE PERMITTED DURING THE RAINY SEASON ONLY FROM APRIL 1 TO APRIL 15, AND ONLY WHEN ON-SITE SOIL CONDITIONS PERMIT THE WORK TO BE PERFORMED IN COMPLIANCE WITH SCC CH. 11A AND 11.

YEAR ROUND REQUIREMENTS

LANDSCAPING SHALL BE INSTALLED.

- 1. DURING THE NON-RAINY SEASON, ON ANY DAY WHEN THE NATIONAL WEATHER SERVICE FORECAST IS A CHANCE OF RAIN OF 30% OR GREATER WITHIN THE NEXT 24 HOURS, STORM WATER BMPS REFERENCED OR DETAILED IN PRMD'S BEST MANAGEMENT PRACTICES GUIDE SHALL BE IMPLEMENTED, INSTALLED, AND FUNCTIONAL ON THE SITE TO PREVENT SOIL AND OTHER POLLUTANT DISCHARGES. AT ALL OTHER TIMES, BMPS SHOULD BE STORED ON SITE IN PREPARATION FOR INSTALLATION PRIOR TO RAIN
- 2. EROSION PREVENTION AND SEDIMENT CONTROL MEASURES SHALL BE INSPECTED BY THE OWNER BEFORE FORECASTED STORM EVENTS AND AFTER STORM EVENTS TO ENSURE MEASURES ARE FUNCTIONING PROPERLY. EROSION PREVENTION AND SEDIMENT CONTROL MEASURES THAT HAVE FAILED OR ARE NO LONGER EFFECTIVE SHALL BE PROMPTLY REPLACED. EROSION PREVENTION AND SEDIMENT CONTROL MEASURES SHALL BE MAINTAINED UNTIL DISTURBED AREAS ARE STABILIZED.
- 3. THE LIMITS OF GRADING SHALL BE DEFINED AND MARKED ON SITE TO PREVENT DAMAGE TO SURROUNDING VEGETATION.
 PRESERVATION OF EXISTING VEGETATION SHALL OCCUR TO THE MAXIMUM EXTENT PRACTICABLE. ANY EXISTING VEGETATION WITHIN
 THE LIMITS OF GRADING THAT IS TO REMAIN UNDISTURBED BY THE WORK SHALL BE IDENTIFIED AND PROTECTED FROM DAMAGE BY
 MARKING, FENCING, OR OTHER MEASURES.
 4. CHANGES TO THE EROSION PREVENTION AND SEDIMENT CONTROL PLAN MAY BE MADE TO RESPOND TO FIELD CONDITIONS AND
- SHALL BE NOTED ON THE PLAN.

 5. DISCHARGES OF POTENTIAL POLLUTANTS FROM CONSTRUCTION SITES SHALL BE PREVENTED USING SOURCE CONTROLS TO THE MAXIMUM EXTENT PRACTICABLE. POTENTIAL POLLUTANTS INCLUDE BUT ARE NOT LIMITED TO: SEDIMENT, TRASH, NUTRIENTS, PATHOGENS, PETROLEUM HYDROCARBONS, METALS, CONCRETE, CEMENT, ASPHALT, LIME, PAINT, STAINS, GLUES, WOOD PRODUCTS,
- PESTICIDES, HERBICIDES, CHEMICALS, HAZARDOUS WASTE, SANITARY WASTE, VEHICLE OR EQUIPMENT WASH WATER, AND CHLORINATED WATER.

 6. ENTRANCE(S) TO THE CONSTRUCTION SITE SHALL BE MAINTAINED IN A CONDITION THAT WILL PREVENT TRACKING OR FLOWING OF POTENTIAL POLLUTANTS OFFSITE. POTENTIAL POLLUTANTS DEPOSITED ON PAVED AREAS WITHIN THE COUNTY RIGHT—OF—WAY, SUCH AS ROADWAYS AND SIDEWALKS, SHALL BE PROPERLY DISPOSED OF AT THE END OF EACH WORKING DAY OR MORE FREQUENTLY AS NECESSARY. THE CONTRACTOR SHALL BE RESPONSIBLE FOR CLEANING CONSTRUCTION VEHICLES LEAVING THE SITE ON A DAILY
- ROADWAYS SHALL BE REMOVED AT THE END OF EACH WORKING DAY OR MORE OFTEN AS NECESSARY.

 7. ALL DISTURBED AREAS SHALL BE PROTECTED BY USING EROSION PREVENTION MEASURES TO THE MAXIMUM EXTENT PRACTICABLE, SUCH AS ESTABLISHING VEGETATION COVERAGE, HYDROSEEDING, STRAW MULCH, GEOTEXTILES, PLASTIC COVERS, BLANKETS OR MATS. TEMPORARY OR PERMANENT REVEGETATION SHALL BE INSTALLED AS SOON AS PRACTICAL AFTER VEGETATION REMOVAL BUT IN ALL CASES PRIOR TO OCTOBER 15. PRIOR TO FINAL INSPECTION, ALL DISTURBED AREAS SHALL BE REVEGETATED OR

BASIS TO PREVENT DUST, SILT, AND DIRT FROM BEING RELEASED OR TRACKED OFFSITE. ALL SEDIMENT DEPOSITED ON PAVED


- 8. WHENEVER IT IS NOT POSSIBLE TO USE EROSION PREVENTION MEASURES ON EXPOSED SLOPES, SEDIMENT CONTROL DEVICES SUCH AS FIBER ROLLS AND SILT FENCES SHALL BE INSTALLED TO PREVENT SEDIMENT MIGRATION. FIBER ROLLS AND SILT FENCES SHALL BE TRENCHED AND KEYED INTO THE SOIL AND INSTALLED ON CONTOUR. SILT FENCES SHALL BE INSTALLED APPROXIMATELY 2 TO 5 FEET FROM TOE OF SLOPE.
- 9. HYDROSEEDING SHALL BE CONDUCTED IN A THREE STEP PROCESS. FIRST, EVENLY APPLY SEED MIX AND FERTILIZER TO THE EXPOSED SLOPE. SECOND, EVENLY APPLY MULCH OVER THE SEED AND FERTILIZER. THIRD, STABILIZE THE MULCH IN PLACE. AN EQUIVALENT SINGLE STEP PROCESS, WITH SEED, FERTILIZER, WATER, AND BONDED FIBERS IS ACCEPTABLE.
- APPLICATIONS SHALL BE BROADCASTED MECHANICALLY OR MANUALLY AT THE RATES SPECIFIED BELOW. SEED MIX AND FERTILIZER SHALL BE WORKED INTO THE SOIL BY ROLLING OR TAMPING. IF STRAW IS USED AS MULCH, STRAW SHALL BE DERIVED FROM WHEAT, RICE, OR BARLEY AND BE APPROXIMATELY 6 TO 8 INCHES IN LENGTH. STABILIZATION OF MULCH SHALL BE DONE HYDRAULICALLY BY APPLYING AN EMULSION OR MECHANICALLY BY CRIMPING OR PUNCHING THE MULCH INTO THE SOIL. EQUIVALENT METHODS AND MATERIALS MAY BE USED ONLY IF THEY ADEQUATELY PROMOTE VEGETATION GROWTH AND PROTECT EXPOSED


MATERIALS	<u>APPLICATION RATE</u> (POUNDS PER ACRE)
SEED MIX Bromus mollis (BLANDO BROME) Trifolium hirtum (HYKON ROSE O	40
FERTILIZER 16-20-0 & 15% SULPHUR MULCH	500
STRAW HYDRAULIC STABILIZING* M-BINDER OR SENTINEL	4000 75–100
EQUIVALENT MATERIAL	PER MANUFACTURER


*NON-ASPHALTIC, DERIVED FROM PLANTS


- 10. DUST CONTROL SHALL BE PROVIDED BY CONTRACTOR DURING ALL PHASES OF CONSTRUCTION.
- 11. STORM DRAIN INLETS SHALL BE PROTECTED FROM POTENTIAL POLLUTANTS UNTIL DRAINAGE CONVEYANCE SYSTEMS ARE FUNCTIONAL AND CONSTRUCTION HAS BEEN COMPLETED.
- 12. ENERGY DISSIPATERS SHALL BE INSTALLED AT STORM DRAIN OUTLETS WHICH MAY CONVEY EROSIVE STORM WATER FLOW.
- 13. SOIL, MATERIAL STOCKPILES, AND FERTILIZING MATERIAL SHALL BE PROPERLY PROTECTED TO MINIMIZE SEDIMENT AND POLLUTANT TRANSPORT FROM THE CONSTRUCTION SITE.

 14. SOLID WASTE, SUCH AS TRASH, DISCARDED BUILDING MATERIALS AND DEBRIS, SHALL BE PLACED IN DESIGNATED COLLECTION
- AREAS OR CONTAINERS. THE CONSTRUCTION SITE SHALL BE CLEARED OF SOLID WASTE DAILY OR AS NECESSARY. REGULAR REMOVAL AND PROPER DISPOSAL SHALL BE COORDINATED BY THE CONTRACTOR.
- 15.A CONCRETE WASHOUT AREA, SUCH AS A TEMPORARY PIT, SHALL BE DESIGNATED TO CLEAN CONCRETE TRUCKS AND TOOLS. AT NO TIME SHALL CONCRETE PRODUCTS AND WASTE BE ALLOWED TO ENTER COUNTY WATERWAYS SUCH AS CREEKS OR STORM DRAINS. NO WASHOUT OF CONCRETE, MORTAR MIXERS, OR TRUCKS SHALL BE ALLOWED ON SOIL.
- 16.PROPER APPLICATION, CLEANING, AND STORAGE OF POTENTIALLY HAZARDOUS MATERIALS, SUCH AS PAINTS AND CHEMICALS, SHALL BE CONDUCTED TO PREVENT THE DISCHARGE OF POLLUTANTS.
- 17. TEMPORARY RESTROOMS AND SANITARY FACILITIES SHALL BE LOCATED AND MAINTAINED DURING CONSTRUCTION ACTIVITIES TO PREVENT THE DISCHARGE OF POLLUTANTS.
- 18. APPROPRIATE VEHICLE STORAGE, FUELING, MAINTENANCE, AND CLEANING AREAS SHALL BE DESIGNATED AND MAINTAINED TO PREVENT DISCHARGE OF POLLUTANTS.

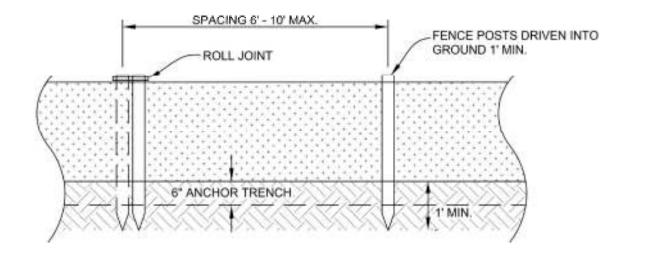

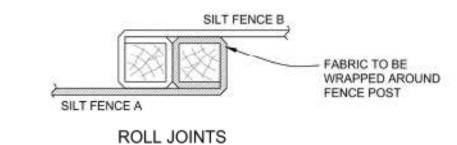

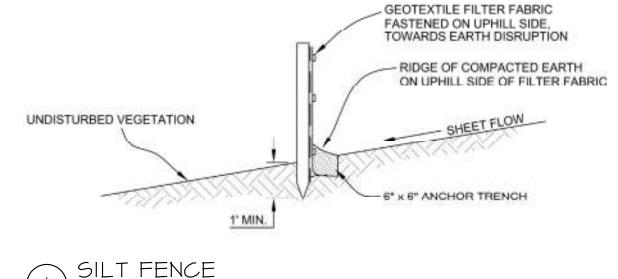

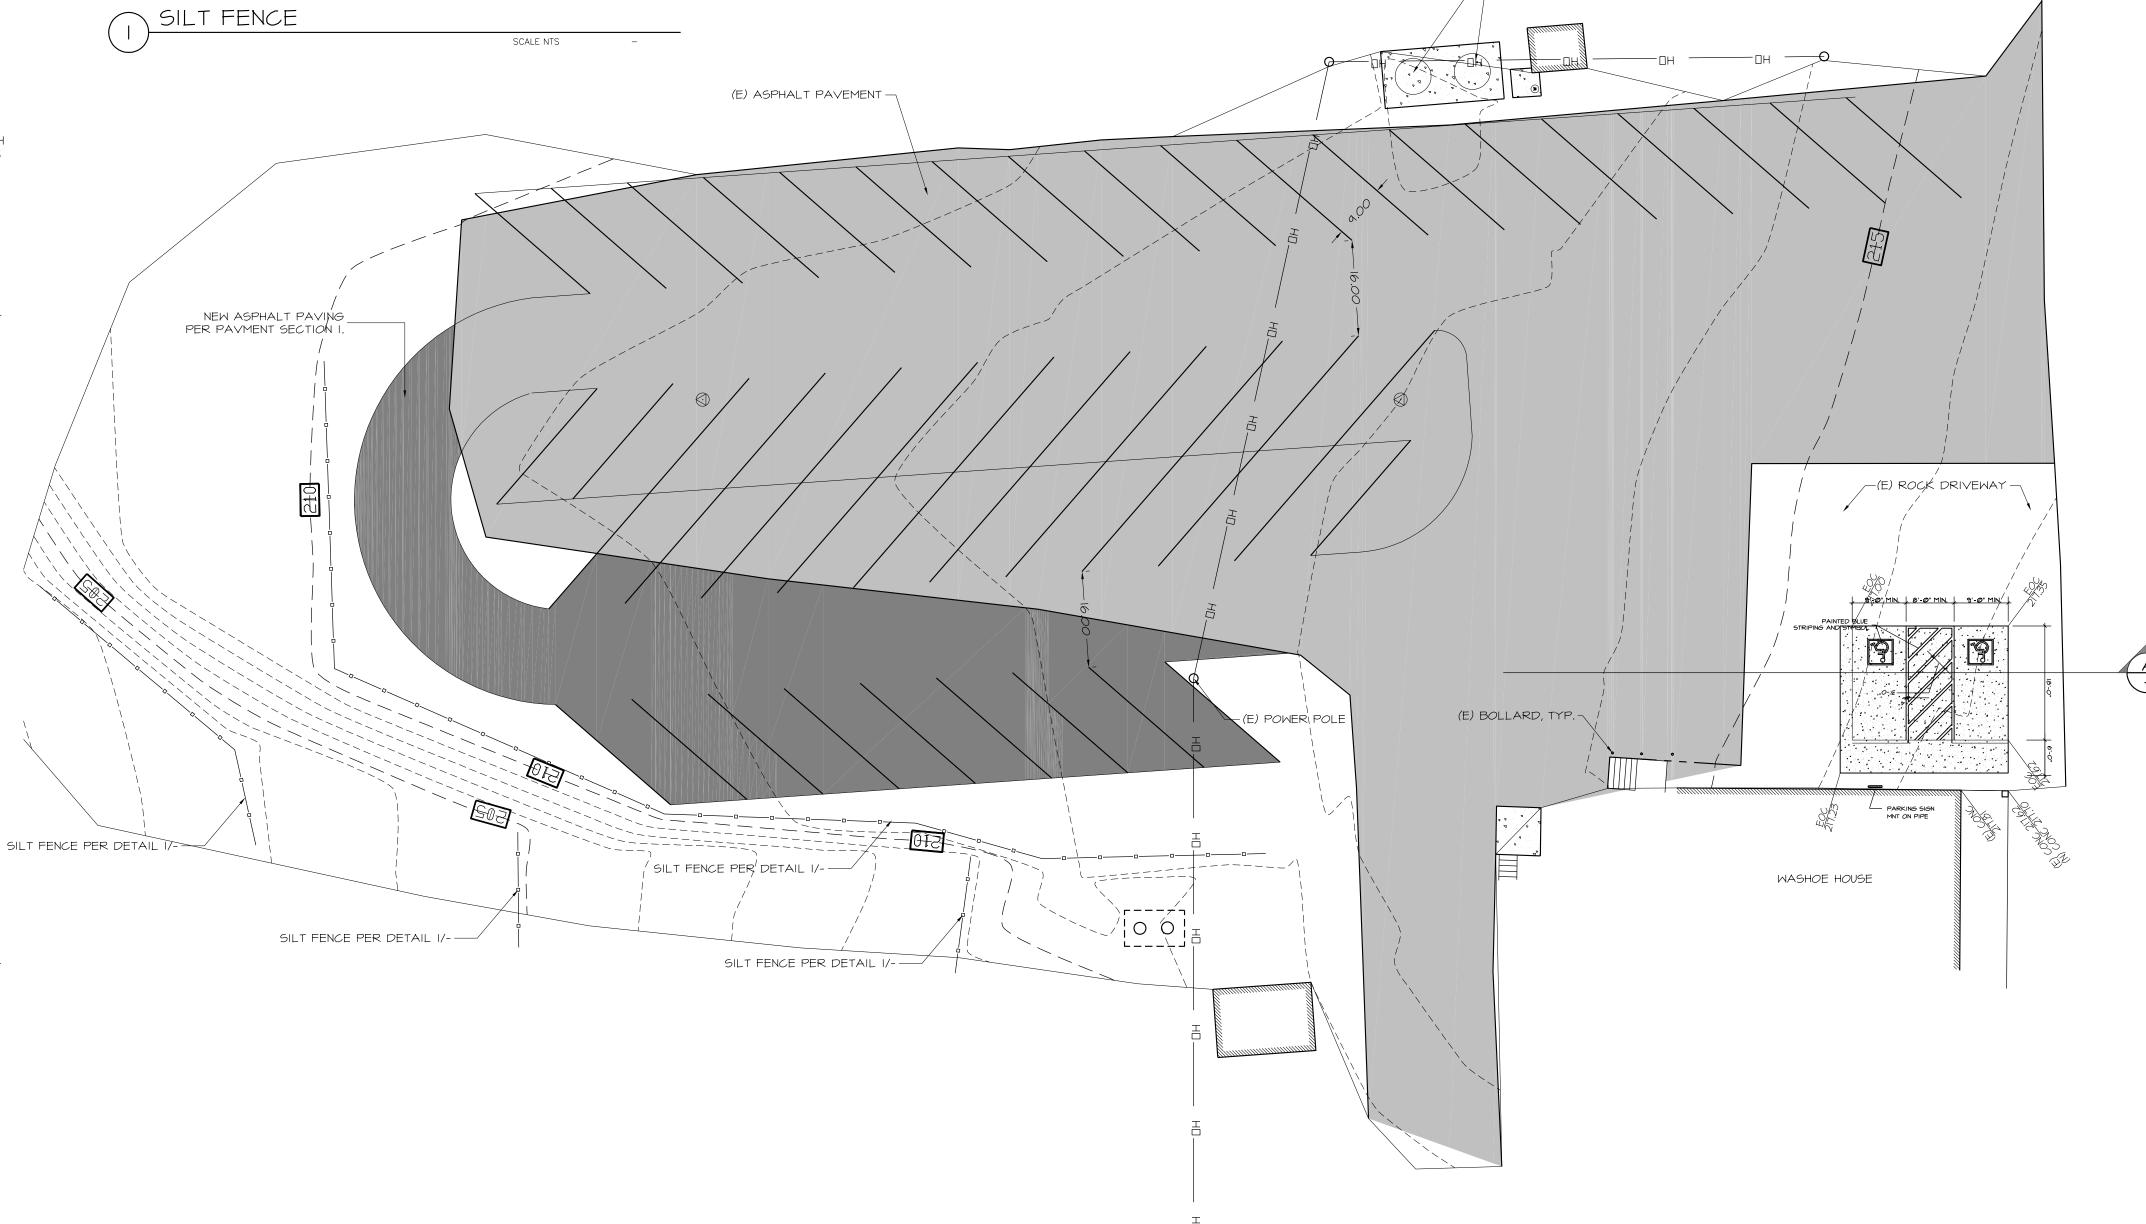

(E) WATER TANKS ON CONC. PAD

REVISION / DATE EXCELIS
ISSUED
FOR
REVIEW I2IOI4 COX
ISSUED
FOR
PERMIT
ISSUED
FOR
USE

ENGINEERING CO., INC.

3980 SANTA ROSA AVENUE SANTA ROSA, CA 95407 Tel (707) 545-7440



WASHOE HOUSE PROPOSED PARKING LOT

2840 ROBLAR ROAD
PETALUMA, CALIFORNIA

DATE: 06/19/20

5CALE: 1"=20'

DRAWN BY: PRC

JOB #: 144.01

FILE #: 144.01

SHEET

3of **3** shi